



LED street light

Tiger SL001 Series

CONCEPT

The Tiger range combines the energy efficiency of led technology with photometric. The Tiger is available in three size to provide a consistent solution for different outdoor environments.

FEATURES


- Simple modeling, die casting and glass. Finish color is optional.
- A variety of PC module lenses can meet the needs of various road light distribution;
- CCT: 3000K/4000K/5000K;
- IP66 design, suitable for wet location, 5mm glass for IK08;
- Optional LED : Seoul LED, CREE;
- 130LM/W, excellent cost performance
- Designed for Ø42-Ø60mm pole, easy and fast installation.
- Optional: 10kv spd,3-pin NEMA photocell;
- Operating temperature: -20°C-40°C

SPECIFICATIONS




35W,60W,90W,120W

PRODUCT SIZE

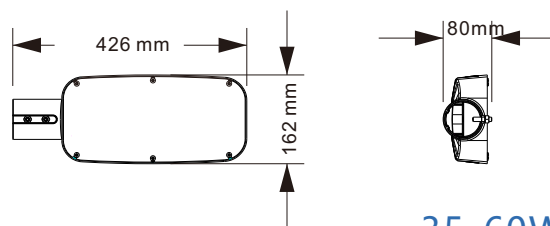

35-60W

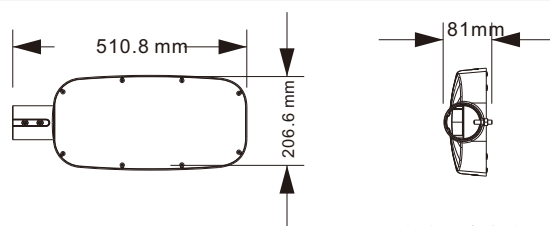


90-120W


SPECIFICATIONS

Model	SI001			
AC Input Voltage	100-277V			
Wattage	35W	60W	90W	120W
Luminous flux(LM)	4550	7800	11700	15600
Luminous Efficiency (LM/W)	130			
PF	≥0.9			
Ra	70			
IP	66			
Lifetime(Hrs)	50000			
Work environmental temperature	-25°C~ 40°C			


DISTRIBUTION CURVE FLUX




TP-III-M



TP-III-S



TP-II-M



TP-II-S



IP66